



RIPPŌTAI

PLAN OF ACTION

PROJECT

ADDRESS

CLIENT

PRINCIPLE ARCHITECT

PROJECT LEAD

How the Execution runs

Execution at site is organised into seven phases. Each phase has a defined scope and a defined duration, so progress can be reviewed against a clear benchmark rather than an open-ended schedule. Phases are deliberately overlapped — as one phase moves towards completion, the next one is already mobilised on site, which compresses the overall timeline without compromising the sequence of work.


07

4–5 months

Execution phases from services to handover

Indicative site duration with overlaps, subject to Terms

PHASE OVERLAP – INDICATIVE

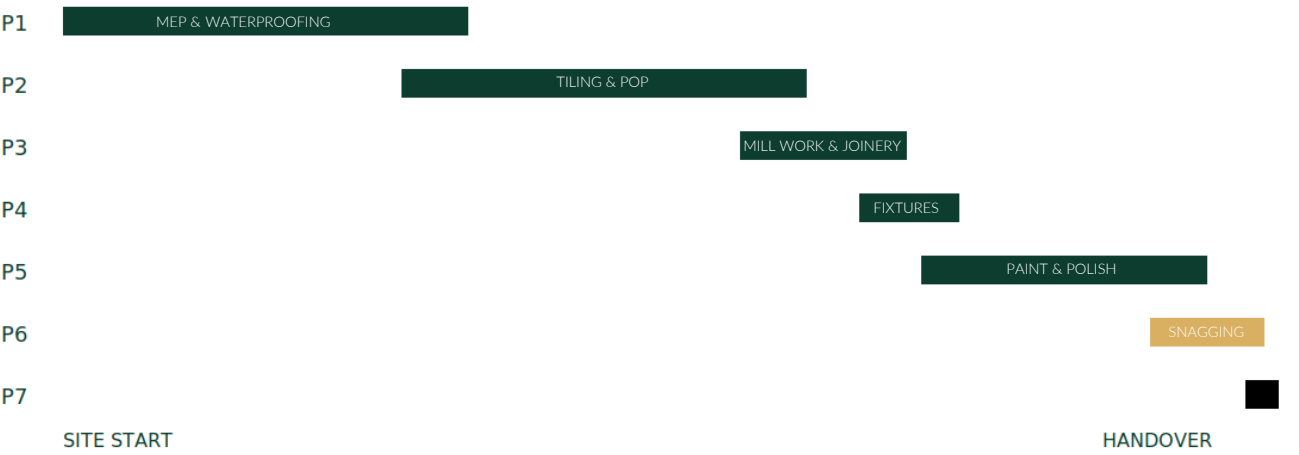

PLAN OF ACTION

PHASE	DETAIL	TIMELINE
01	MEP & Waterproofing Waterproofing of wet areas and terraces, air-conditioning piping and ducting, concealed electrical wiring and conduiting, and plumbing lines. all first-fix services executed and tested before surfaces are closed. PARALLEL WORK – OVERALL MATERIAL SELECTION	30–45 Days
02	Tiling & POP Floor and wall tiling, stone and dado work, followed by POP punning, false ceiling framing and cove detailing, with all service points and light cut-outs coordinated as per the approved ceiling layout. PARALLEL – LOOSE FURNITURE FINALISATION	30–45 Days
03	Millwork & Joinery Modular kitchen, wardrobes, vanities and site-fabricated mill work installed as per approved drawings and finish samples, followed by the first coat of paint across the premises. INCLUDES – PAINT 1ST COAT	10–15 Days
04	Fixtures & Fittings Installation of light fixtures, electrical fittings and appliances, CP fittings and sanitaryware, along with hardware and accessories followed by testing and commissioning of all installed points.	07 Days
05	Paint & Polish Final coat of paint on all walls and ceilings, polishing of wood work and veneer surfaces, touch-ups, and finishing of edges and joints to the agreed sheen and shade.	30 Days
06	Snagging Joint inspection of the premises, preparation of a written snag list, and rectification of every recorded item followed by deep cleaning and a final walkthrough for sign-off. SITE IS NOT HANDED OVER UNTIL SNAGS ARE CLOSED	07–10 Days
07	Handover Handing over of the completed premises along with keys, warranty cards, appliance manuals, as-built service drawings and vendor contacts, together with a walkthrough of operation and maintenance requirements.	On completion

Terms & Conditions

01 Overlapping of phases

From Phase 2 onwards, the next phase commences as the current phase moves towards completion. This overlap is intentional and is planned to keep work continuous at site.

02 Snag closure before handover

During the snag phase, the site will not be handed over to the client until every item on the snag list has been rectified and jointly signed off.

03 Commencement & counting of days

The timeline begins from the date of clear and unobstructed possession of the site. Durations stated are working days and exclude Sundays, public holidays and days on which work is stopped by any authority.

04 Timely client decisions

Material, finish, fixture and furniture selections are to be approved within the parallel window indicated against each phase. Any delay in approvals will shift all subsequent phases day for day.

05 Client-supplied items

Items procured directly by the client are to reach site as per the agreed schedule. Delay in the delivery, shortfall or damage of such items is not attributable to Rippotai and will extend the affected phase accordingly.

06 Changes in scope

Any change in layout, specification or scope after a phase has commenced will be treated as a variation. The cost and time implication will be shared in writing and executed only after written approval.

07 Payments

Payments are to be released as per the agreed Payment Schedule. Mobilisation of the next phase is subject to the corresponding milestone payment being cleared.

08 Site facilities

Uninterrupted access to the site, along with power, water, and a secure area for storage of material, is to be provided by the client at no cost for the duration of the works.

09 Circumstances beyond control

Statutory construction restrictions, labour strikes, extreme weather, transport disruption and unavailability of specified material are beyond our control and will extend the timeline proportionately, with prior intimation to the client.

10 Post-handover defects

Issues reported after handover fall under the defect liability terms of the signed Agreement and not under the snag phase of this plan.
